Why Loom +?

Since the advent of COVID-19, people started spending much more time indoors as a sanctuary with increasing the awareness of hygiene.



Can carpets, which are widely used for indoor flooring, meet this requirement?



Stains by carelessness



Bad smells / odors







Better Carpet -Loom+





Alternative solution of Carpet as indoor flooring under COVID-19

for people spending much more time indoors as a sanctuary with increasing the awareness of hygiene.



HYGIENIC & WATERPROOF

- Industry's only anti-bacterial & anti-microbial dual protection UL-2282 & UL-2283
- · Waterproof, stain-resistant to enable easy cleaning & maintenance

INFINITE DESIGN POSSIBILITIES

- · Diversity in designs that match carpet flooring
- · Mix & match among woven flooring and wood-stone LVT,
- · Seamless installation that resembles sheet flooring

ULTIMATE PERFORMANCE


- · Superior dimensional stability with EMTTM Core.
- Outstanding resistance to scratches and dents, withstanding varying levels of foot traffic
- · Fray-proof with clean-cut finishing to enable flexible cutting





LOOM* DESIGN

PLAY with COLOR, SIZE and TEXTURE



Profound color composition

Realizing multiple tones of color - carefully selected by artists - we provide you with very unique colors that express LOOM+ in harmony with surrounding interiors.



Infinite array of color and textures

Available in myriad colors covering diverse tones like neutral, cool, warm, light and dark tones, we give you unique design patterns.



Designed for mix & match

Creative and unique 'mix & match' only by LOOM+ is realized by introducing the same weaving system to various design patterns.



25x100cm 50x50cm Tile size Plank size

Optimal 2 size variation

With our unique 2 module sizes of 50cm×50cm and 25cm×100cm, the first introduced in woven flooring market, you can elevate flat environments to inspiring interior spaces.

LOOM* TECHNOLOGY

PROVEN INNOVATION



Distinguished NOX EMT[™] Core Structure

NOX EMT[™] Core structure featured with innovative functionality and safety, proven in more than 50 countries over 20 years

→ 1. Most Hygienic





- + World's first and only dual protection coating system includes NOX EPT™ Shield, UL-certified to meet ECVP standards for anti-bacterial and anti-microbial performance
- + Safe and clean with OEKO-TEX®
- + Easy cleaning and maintenance



2. Most Stable & Unique Multi-Layered Structure



- + The most reliable, distinguished NOX EMT™ Core structure for outstanding dimensional stability
- + Consistent product thickness for mix & match across all LOOM+ patterns

3. Tough & Waterproof

+ Superior wear resistance and waterproof

function for commercial applications





4. Fray-Proof



+ Clean-cut finishing to prevent fraying even when tiles are cut during installation

GREENGUARD





Quick

Quick and easy loose lay* installation without glue



Non-Slip

Slip-resistance with woven fabric surface



Easy

Minimal cleaning time and low maintenance



Colorfast properties

retain gorgeous original colors over time

Colorfast



Silent & Soft Soft surface absorbing


POP Vibrant & Dazzling

LOOM+ POP collection proposes a uniquely creative design that spotlights an area while easily blending in with its surroundings. This upbeat pattern scatters parallelograms of differing shades onto a plain jacquard fabric of similar color schemes. The design's bold and energetic image is maximized with a widened, brighter color selection.

Enrich your space with LOOM+ POP, a lively, modern collection that is stylish but nonetheless caters to universal taste.









FQ-2702





FQ-2703

FQ-2704





FQ-2705

FQ-2706

Each box contains a random set of pieces, which present different parts of the pattern.

08 / 09

Reinvent Spaces with

PLAY!


All work together in any combination, giving you the freedom to create your own design by mixing & matching different patterns and colors in 2 size variations.





25x100cm

NEW LOOM* PLAY!




LOOM PLAY #21




LOOM PLAY #26




LOOM PLAY #22




LOOM PLAY #27




LOOM PLAY #23




LOOM PLAY #28



LOOM PLAY #24




LOOM PLAY #29



LOOM PLAY #25

LOOM PLAY #30

INSTALLATION CONCEPT GUIDE

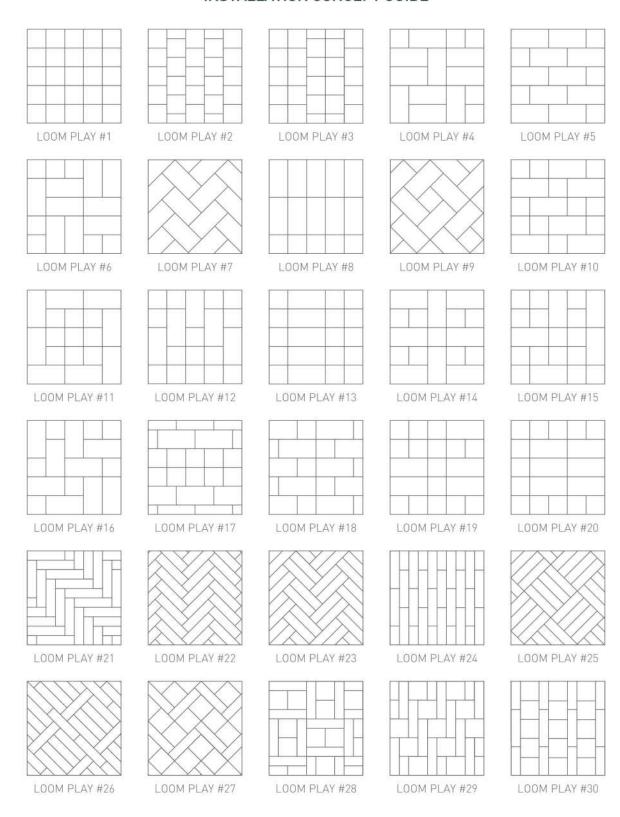



CREATE YOUR OWN DESIGN


LOOM* POP collection can also be installed with plain jacquard fabrics


of the same color scheme. Colors not included in the official collection and their respective plain jacquard fabrics are available upon request.

FQ-2702 NT207-8 (plain)

12 / 13

Restaurant

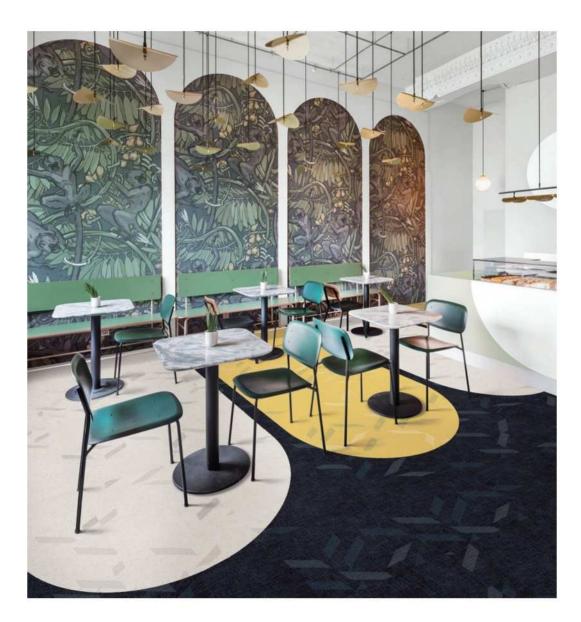




Corporate




LOOM* POP grey is not included in the official collection, but is available upon request.



FQ-2701 FQ-2702 NT206-6 (grey) Hospitality



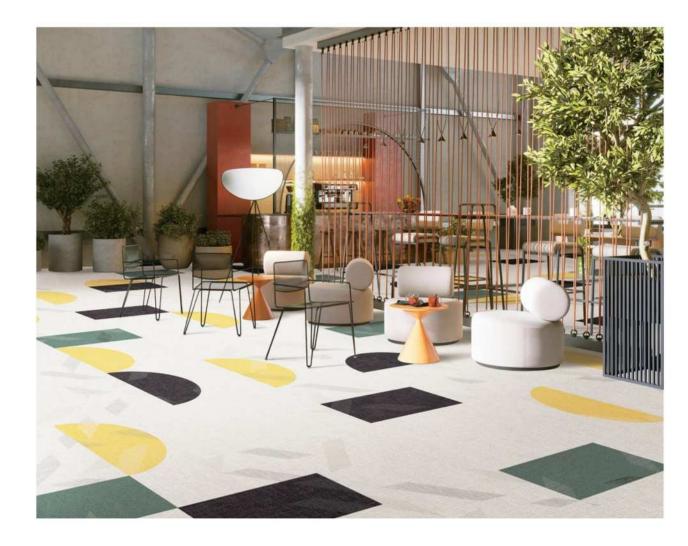



LOOM PLAY #1

FQ-2701 FQ-2702 FQ-2703 FQ-2704


FQ-2701 FQ-2702 FQ-2706



16 / 17

Education & Libraries







Retail shop





Sports Center

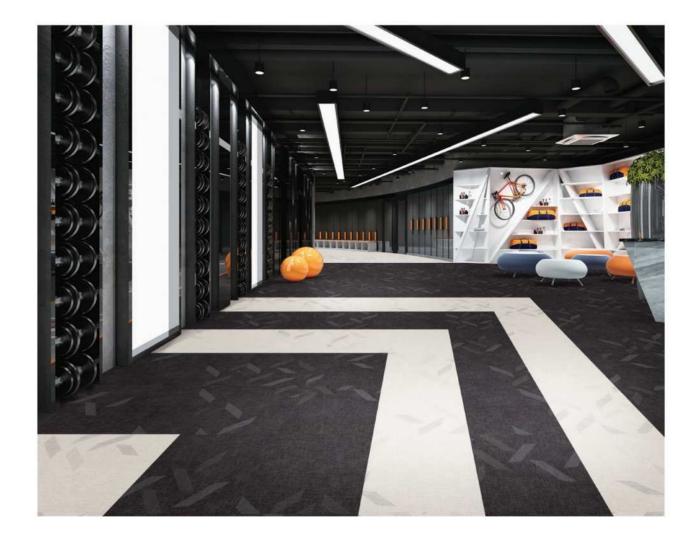



LOOM PLAY #1

TECHNICAL INFORMATION

1. Size & Packing

Size(mm)	Thickness(mm)	Pcs/Box	m'/Box	Kg/m²
500×500	3	16 pcs/box	4m'	5.0
	5	10 pcs/box	2.5 m ⁴	8.2
250x1000	3	16 pcs/box	4m²	5.0
	5	10 pcs/box	2.5 m²	8.2

2. Test Result

Test Item	Standard	LOOM+	
Level of use	EN 685	33	
Fraying	EN 1814	Frayproof	
Thermal resistance	ISO 8302	0.02m²K/W	
Castor chair resistance	EN 985	No damage	
Dimensional stability	ISO 23999 EN 986	\leq 0.10% (Norm: \leq 0.25%) Passed	
Fire resistance	EN 13501-1	Bfl -s1	
Indoor air quality		Low VOC (floor score certified	
Underfloor heating	EN 12524	Suitable	
Light fastness	ISO 105-B02	≥6	
Slip resistance	EN 13893	DS	
Flexibility	ISO 24344	Passed	
Impact sound insulation	ISO 10140-3	9dB	
Body Voltage	EN 1815	≤ 2KV	
Squareness & Straightness	ISO 24342 ASTM F2055	No deviation ≤ 0.01 in	
Residual indentation	ISO 24343-1 ASTM F1914	≤ 0.1mm < 8%	
Resistance to chemicals	ISO 26987 ASTM F925	No Defects	

3. Caution

Condition in at least 19°C or the normal temperature of the room where the product is to be laid, for at least 48 hours before installing. Cartons must be stacked less than 5 high and tiles removed 30 minutes before use. The site conditions must be maintained during installation and for at least 48 hours after completion. NOX Corporation will not accept claims where these instructions have not been followed.

4. Certificate











OEKO-TEX®

CONFIDENCE IN TEXTILES

STANDARD 100





Please visit www.noxglobal.com for detailed installation / maintenance guides and technical information.